

USN

--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--	--

10ME/PM82

**Eighth Semester B.E. Degree Examination, Dec.2016/Jan.2017**  
**Control Engineering**

Time: 3 hrs.

Max. Marks:100

**Note: Answer FIVE full questions, selecting at least TWO questions from each part.**

**PART - A**

- 1 a. Define: i) System; ii) Controller; iii) Open loop system; iv) Closed loop system; v) Feed back, with examples. (05 Marks)
- b. With the help of block diagram, explain i) PI ii) PID. (10 Marks)
- c. List the advantages and disadvantages of i) Proportional controller; ii) Integral controller. (05 Marks)
  
- 2 a. Write the differential equations governing the mechanical system shown. Also draw F-V and F-C analogous circuits. (14 Marks)

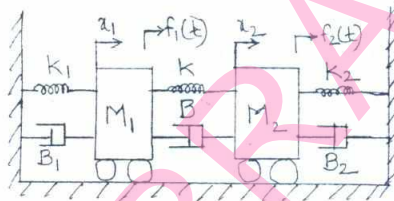


Fig.Q.2(a)

- b. Obtain the transfer function for the given thermal system. (06 Marks)

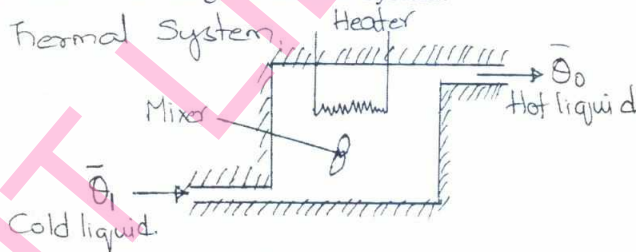


Fig.Q.2(b)

- 3 a. Reduce the block diagram and obtain control ratio  $\frac{C(s)}{R(s)}$ . (10 Marks)


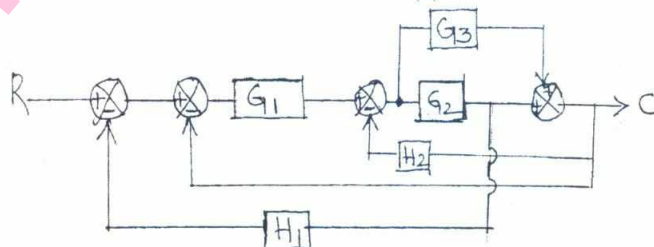


Fig.Q.3(a)

Important Note : 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.  
2. Any revealing of identification, appeal to evaluator and /or equations written eg, 42+8=50, will be treated as malpractice.

- b. Obtain the overall TF  $\frac{C(s)}{R(s)}$  of the SFG given: (10 Marks)

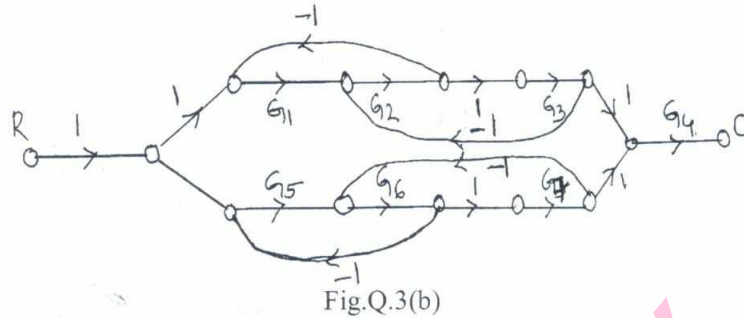

- 4 a. Define: i) Time response; ii) Step signal; iii) Ramp signal; iv) Parabolic signal; v) Impulse signal. (05 Marks)
- b. Derive an expression for response of 1<sup>st</sup> order system for unit step input. (05 Marks)
- c. A unity feedback CS has an OLTF  $G(s) = \frac{10}{s(s+2)}$ . Find tr, %M<sub>p</sub>, t<sub>p</sub>, t<sub>s</sub> for a step input of 12 units. (05 Marks)
- d. Using R-H criterion, determine the stability of the system represented by the characteristic equation  $s^5 + 4s^4 + 8s^3 + 8s^2 + 7s + 4 = 0$ . (05 Marks)

### PART - B

- 5 a. Construct a Nyquist plot for a feedback control system whose OLTF is given by  $G(s)H(s) = \frac{5}{s(1-s)}$ . Comment on the stability of open loop and closed loop system. (14 Marks)
- b. Define with respect to Nyquist plot, i) Gain Margin; ii) Phase Margin; iii) Relative stability. (06 Marks)
- 6 Sketch the bode plot for the following TF and determine phase margin and gain margin. (20 Marks)
- $$G(s) = \frac{75(1+0.2s)}{s(s^2+16s+100)}$$
- 7 Sketch the root locus for UFB system whose open loop TF. (20 Marks)
- $$G(s) = \frac{K}{s(s^2+6s+10)}$$
- 8 a. Define: i) State; ii) State variables; iii) State space; iv) State trajectory; v) State vector. (05 Marks)
- b. Write a note on: i) Lag compensator; ii) Lead compensator. (10 Marks)
- c. Explain the following terms with examples: i) Controllability; ii) Observability. (05 Marks)

\* \* \* \* \*

USN

--	--	--	--	--	--	--	--	--	--

10ME844

**Eighth Semester B.E. Degree Examination, Dec.2016/Jan.2017**  
**Automotive Engineering**

Time: 3 hrs.

Max. Marks:100

**Note: Answer any FIVE full questions, selecting  
atleast TWO questions from each part.**

**PART – A**

- 1 a. List out the spark ignition and compression ignition engines components and mention its functions. (10 Marks)
- b. What is air swirl? What are the methods of swirl generation in compression ignition engine? (06 Marks)
- c. Explain the splash lubrication, with a neat sketch. (04 Marks)
- 2 a. What is octane and Cetane ratings for petrol and diesel fuel? (04 Marks)
- b. Explain the construction and working principle of Zenith carburetor with neat sketch. (10 Marks)
- c. Explain the working principle of electrical fuel pump with neat sketch. (06 Marks)
- 3 a. What do you understand by the term supercharging and turbocharging? (04 Marks)
- b. Explain the centrifugal type and Root's supercharger with neat sketch. (10 Marks)
- c. Explain any three methods of turbocharging. (06 Marks)
- 4 a. List out the different types of ignition system. Explain the construction and working principle of electronic ignition system. (10 Marks)
- b. Draw neat circuit diagram of battery ignition system and explain the functions of various components in the system. (10 Marks)

**PART – B**

- 5 a. Explain the construction and working principle of multi plate clutch. (10 Marks)
- b. Explain with diagram the working of constant mesh gear box and mention its advantages over sliding mesh gear box. (10 Marks)
- 6 a. What is the function of differential? Explain its operating principle with neat diagram. (10 Marks)
- b. Define the following terms : i) camber ii) castor iii) king pin inclination iv) toe in and toe out v) included angle. (10 Marks)
- 7 a. Explain the working principle of the telescopic type shock absorber with a neat sketch. (09 Marks)
- b. Explain the working of hydraulic braking system with neat diagram. (08 Marks)
- c. Draw the layout of air brake system. (03 Marks)
- 8 a. Explain the working principle of exhaust gas recirculation (EGR) system with neat diagram. List out the methods of controlling the engine emission. (10 Marks)
- b. What is catalytic converter? How they are helpful in reducing exhaust gas emission? Explain with neat sketch the 3-way catalytic converter system. (10 Marks)

\*\*\*\*\*

Important Note : 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.  
2. Any revealing of identification, appeal to evaluator and/or equations written eg. 42+8 = 50, will be treated as malpractice.