15ME81

Eighth Semester B.E. Degree Examination, June/July 2019 Operations Research

Time: 3 hrs.

Max. Marks: 80

Note: 1. Answer any FIVH full questions, choosing, ONE full question from each module. 2. Use of statistical tables is permitted.

Module-1

1 a. List and explain briefly the phases of operations research.

(06 Marks)

b. A paper manufacturing company produces two grades of papers grade 'R' and grade 'S'. Because of raw material restrictions, not more than 450 tonnes of grade R and 240 tonnes of grade S papers can be produced per week. It requires 0.2 hours to produce 1 tonne of grade R paper and 0.4 hours to produce 1 tonne of grade S paper. There are 108 production hours per week. The profit per tonne of grade R paper is Rs 400 and per tonne of grade S paper it is Rs. 500. Formulate a mathematical model to determine how many tones of grade R and grade S papers the company has to produce per week to maximize its profit. Solve graphically.

(10 Marks)

OR

2 a. Discuss the limitations of operations research.

(06 Marks)

b. Solve the following LPP by graphical method and indicate the solution:

Maximize $Z = 2x_1 + 3x_2$

Subject to constraints : $x_1 - 2x_2 \le 0$

$$2x_1-\ x_2\geq 0$$

$$x_1 - x_2 \le 0$$

with
$$\mathbf{x}_1, \mathbf{x}_2 \geq 0$$
.

(10 Marks)

Module-2

3 a. What is the significance of introducing slack, surplus and artificial variables in LPP?

(04 Marks)

b. Solve the following LPP by Simplex Method:

Maximize $Z = 6x_1 + 4x_2$

Subject to constraints: $-2x_1 + x_2 \le 2$

$$x_1-x_2\leq 2$$

$$3\mathbf{x}_1 + 2\mathbf{x}_2 \le 9$$

with
$$x_1, x_2 \ge 0$$
.

(12 Marks)

OR

4 a. Solve the following LPP by either Big–M method or two phase method:

Minimize $Z = x_1 - 2x_2 - 3x_3$

Subject to constraints: $-2\mathbf{x}_1 + \mathbf{x}_2 + 3\mathbf{x}_3 = 2$

$$2x_1 + 3x_2 + 4x_3 = 1$$

with
$$x_1, x_2, x_3 \ge 0$$
.

(08 Marks)

b. Solve the following by Dual Simplex Method:

Maximize $Z = -2x_1 - 2x_2 - 4x_3$

Subject to constrains: $2x_1 + 3x_2 + 5x_3 \ge 2$

$$3x_1 + x_2 + 7x_3 \le 3$$

$$x_1 + 4x_2 + 6x_3 \le 5$$

with $x_1, x_2, x_3 \ge 0$.

(08 Marks)

Any revealing of identification, appeal to evaluator and /or equations written eg, 42+8=50, will be treated as malpractice. Important Note: 1. On completing your answers, compulsorily draw diagonal cross lines on the remaining blank pages.

Module-3

- What is degeneracy in transportation problem? Discuss its consequence and how it is over come. (04 Marks)
 - b. Obtain the optimum solution to the following transportation problem to minimize the total transportation cost. Initial solution by Vogel's approximation method. (VAM).

		\mathbf{D}_1	D_2	D_3	D ₄	Supply
	O ₁	42	48	38	37	16
Origin	O ₂	40	49	52	51	15
	(C ₃	39	38	40	43	19
	Demand	8	9	11	16	

(12 Marks)

OR

- 6 a. Explain the differences between assignment problem and transportation problem. (05 Marks)
 - b. A small machine shop has five jobs to be assigned to five machines. The following matrix indicates the cost of assigning each of the five jobs to each of the five machines. Obtain the optimum assignment of jobs to machines, in order to minimize the total assignment cost.

		Machines								
		1	2	3	4	5				
	A	11	17	8	15	20				
	В	9	7	12	6	15				
Jobs	C	13	16	15	12	16				
	D	21	24	17	28	26				
	Е	14	10	12	11	15				
		CE	5(b) C	ost N	1atrix					

(11 Marks)

Module-4

- 7 a. Explain the Kendall and Lee's notations for representing queuing models. (04 Marks)
 - b. A small project consists of activities from 'A' to 'I'. The following table indicates the precederace relationship among activities and the three time estimates optimistic, most likely and pessimistic time for each activity in days.

Activity	Predecessor Relationship	Optimistic time 't ₀ '	Most likely time 't _m '	Pessimistic time 't _p '
A	-	2	5	8
H	A	6	9	12
C	A	6	7	8
D	B, G	1	4	7
Е	A	8	8	8
F	D, E	5	14	17
G	С	3	12	21
Н	F, G	3	6	9
I	Н	5	8	11

- i) Draw the project network. Determine the expected time and variance for each activity
- ii) Obtain the total expected duration of the project and critical path
- iii) What is the probability of completing the project in 50 days?

(12 Marks)

OR

8 a. For the following set of activities of a project, draw the network and obtain Early Start [ES], Early Finish [EF], Late Start [LS] and Late Finish [LF] for each activity. Also, indentify the critical path and project duration.

Activity	Predecessor	Duration in days
A		5
В	A	8
С	A	6
D	C	5
Е	B, D	9

(08 Marks)

- b. The mean arrival rate to a service centre is 3 per hour. The mean service time is found to be 10 minutes per service. Assuming Poisson arrival and exponential service time, find:
 - i) Utilization factor for the service facility
 - ii) Probability of two units in the system
 - iii) Queue length
 - iv) Expected waiting time in the system

(08 Marks)

Module-5

9 a. Apply the rules of dominance to reduce the game to (2 × 2) and solve the game to obtain game value and optimum strategies for both the players.

		P	layer	3	
		1	3	3	
	1	2	-2	4	
Player A	2	-1	4	2	
	3	2	1	6	(08 N

b. Solve the following (2×4) game graphically.

(08 Marks)

OR

a. There are seven jobs to be processed on a single machine. The following table indicates the jobs and corresponding processing time in hours. Obtain the optimum sequence of jobs by Shortest Processing Time [SPT] rule that minimizes the mean flow time. Also obtain average in process inventory.

(06 Marks)

b. There are six jobs to be processed on three machines A, B and C in the order CAB. The following table indicates the processing time in hours for the six jobs on the three machines. Obtain optimum sequence of jobs that minimizes the total elapsed time for completing all the jobs on the three machines. Also indicate the idle time of each machine.

Johs	1	2	3	4	5	6
Processing time in hours on M/C A	4	6	7	4	5	3
Processing time in hours on M/C B	8	10	7	8	11	8
Processing time in hours on M/C C	5	6	2	3	4	9

(10 Marks)



Eighth Semester B.E. Degree Examination, June/July 2019

Additive Manufacturing

Time:	3 hrs. Max. Marks: 80
Λ	Note: Answer any FIVE full questions, choosing ONE full question from each module.
1 a. b.	Module-1 Briefly explain the process chain of additive manufacturing. Explain discrete particle system. (08 Marks)
2 a. b.	OR Explain the steps involved in property enhangement using thermal techniques. (08 Marks) Write any eight applications of AM in Aerospace, Automobile, Medical and general engineering. (08 Marks)
3 a. b.	With a neat sketch explain the working of hydraulic piston motors. With a simple pneumatic circuit explain the supply air throttling system. (08 Marks)
4 a.	Classify Direct Current motors. With a neat sketch, explain the working of a DC motor. (98 Marks) Explain the working of diode in a cincuit with neat sketches. (98 Marks)
5 a. b. c.	Module-3 How polymers are classifieα? (02 Marks) Explain polydispersity and molecular weight distribution in polymers. (06 Marks) Write a short note on compression moulding of polymers with a neat sketch. (08 Marks)
6 a.	OR List out the mechanical methods of powder production systems. Explain any one with a neat sketch. (08 Marks) What are the stages of liquid phase sintering? Explain any one stage. (08 Marks)
_	Module-4

(08 Marks)

(08 Marks)

a. Explain the bottom up and top down methods of synthesis.

b. Explain the mechanical grinding methods of creating nano structures.


OR

- With a neat sketch, explain the working of transmission electron microscopy. (08 Marks)
 - b. Explain the working principles of Atomic force microscopy.

(08 Marks)

Module-5

a. List out the advantages of CNC machines over NC machines. (08 Marks) b. Write a part programming for the companent shown in the Fig.Q9(t). (08 Marks)

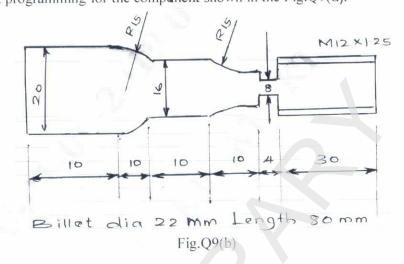

OR

- a. Write down the benefits of automation. (08 Marks) b. Explain the different levels of automation with examples. (08 Marks)

example.

		GBGS SGA		
USN				15ME835
	_	Eighth Semester B.E. Degree Exa	mination, June/July 2019)
		Product Life Cycle	Management	
Tin	ne:	3 hrs.	Max. M	arks: 80
	N	Note: Answer any FIVE full questions, choosing	ONE full question from each mo	dule.
		Module	-1	
1	a.	- in and only in the different phase	ses of Product Life Cycle.	(06 Marks)
	b.	5) . Enp		(04 Marks)
	С,	List the benefits of PLM.		(06 Marks)
		OR		
2	a.	Sketch and explain the PLM has a holistic appro	pach to the management of a produ	ıct.
	h	List and ovnlain the various amounts it is a SDI	M	(06 Marks)
		List and explain the various opportunities of PL What do you mean by PLM feasibility study? E		(06 Marks)
	٠.	what do you mean by I EW leastbillty study? E	xpiaii.	(04 Marks)
3	0	What is Engineering desired F. 1		
3	a. b.			(04 Marks)
	c.		doflife	(06 Marks)
		states and explain the recovery strategies at one	d of the.	(06 Marks)
		OR		
4	a.	Sketch and explain the comparison between	sequential and concurrent engi	neering in
	h	product development process.		(06 Marks)
	υ.	List and explain the most common DFX te development process.	echniques used in the product of	
	c.	The state of the s	roduct design	(06 Marks) (04 Marks)
		and the state of t	A land	(04 Marks)
		Module-3		
5	a.	Sketch and explain the various activities of new		(08 Marks)
	в.	How do you estimate the market potential of a n	new product? Explain.	(08 Marks)
		OR		
6	a.	What is Decision Support System? How it is hel	Inful in decision making? Explain	(08 Marks)
	b.		of launching and tracking of a ne	w product
			8	(08 Marks)
		Model		
7	a.	Module-4 Define Technology Forecasting. Explain why te	chnology forecasting is important	
	No. A.	Laplan why to	emiology forceasting is important.	(08 Marks)
	b.	List and explain any one method of Technology	Forecasting.	(08 Marks)
		OR		
8	a.	Sketch and explain the importance of 'Rele	vance Tree' by taking Automo	hile as an
		exercit and explain the importance of Rele	vallee life by taking Automo	une as an

b. List and explain the importance of ideation tools in the innovation process.

(08 Marks)

(08 Marks)

15ME835

Module-5

What is Model building? How do you classify them? Explain.

(06 Marks)

- b. Explain the following:
 - i) Product structures
- ii) Digital mock up.

(10 Marks)

- 10 Explain the following:
 - a. Data model.
 - b. Product configuration.

 - c. 3D CAD systems.d. Variant Management.

(16 Marks)